

SUNPROTECTION

PRODUCTLINE

BLACKOUTS



PRODUCT TYPE

PVC free glass fiber fabric, acrylic coated + white flock



PRODUCT NAME

07642 NOX

Flocart glass fiber blinds let you enjoy the pleasant sunlight without getting your room overheated. Glass fiber being well known for its dimensional stability, flame retardant properties and durability. Flocart blinds are a durable solution that have been developed for intense use. Moreover, Nox combines the great technical properties of glass fiber with a 100% darkening effect.

TECHNICAL SPECIFICATIONS



Composition

PVC free glass fiber fabric, acrylic coated + white flock



Weight

± 500 gr/m² (± 5%/m²)



Width

89 mm - 127 mm - 2350 mm



Thickness

0,49 mm (± 5%)



Usage

vertical blind



Usage

roller blind



Dimensional stability

variation < 0,5%



Fire classification

NF-P 92/507 (2004) - M1 • NFPA 701 (2015) • Din 4102-01 (May 1998) - B1



Lightfastness

6 - ISO 105 B02 (1999)



Heatsealable

no



Care instructions

wipe with a damp cloth




Thermal and optical factors

Transmission, solar reflection, solar absorption

Reference	Solar Transmission %	Solar Reflection %	Solar Absorption %	Gtot double glazing with argon	UV Transmission %
01 POLAR	0	74,27	25,73	0,33	0
02 IVORY	0	74,00	26,00	0,33	0
03 DUNE	0	73,70	26,27	0,33	0
04 MAGNETIC	0	73,07	26,93	0,33	0
05 STEEL	0	72,33	27,67	0,33	0
06 LATTE	0	71,13	28,87	0,34	0
07 ROCK	0	7,53	26,47	0,33	0
08 MYSTIC	0	74,40	25,60	0,33	0
09 ASH	0	73,57	26,43	0,33	0
10 FOREST	0	73,03	26,97	0,33	0
11 CORAL	0	73,17	26,83	0,33	0
12 CORN	0	72,93	27,07	0,33	0
13 MAGNOLIA	0	73,93	25,97	0,33	0
14 KOALA	0	73,10	26,80	0,33	0

COLORS

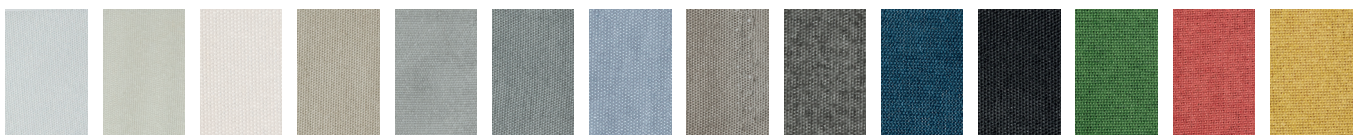

POLAR

IVORY

MAGNOLIA

DUNE

MAGNETIC

STEEL

KOALA

LATTE

ROCK

MYSTIC

ASH

FOREST

CORAL

CORN



TERMS & CONDITIONS - Slight color changes may occur from one production to another.

FLOCART - Zuidstraat 18, 8560 Wevelgem BE • T. +32 (0) 56 420 662 • info@flocart.com • www.flocart.com