



Blindspace® C110x170SS
for Standard Dual Roller Blinds Stacked


HEAD BOX C110x170SS

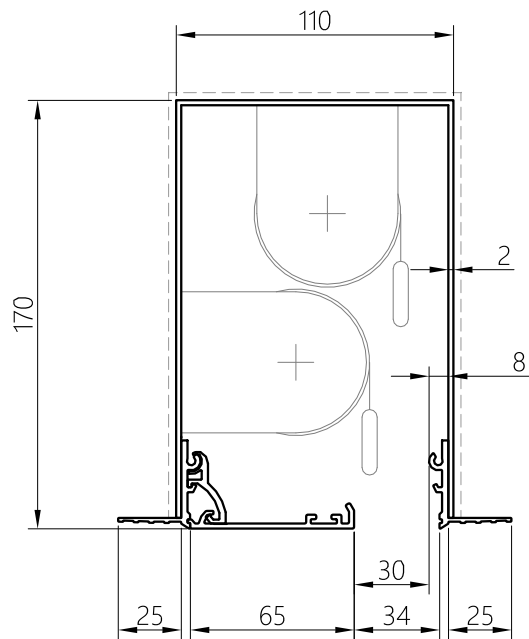

SIDE BOX C110x50SS (OPTIONAL)

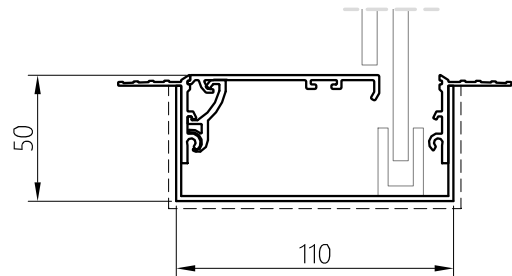

HEM BAR BOX C110x50SS (OPTIONAL)

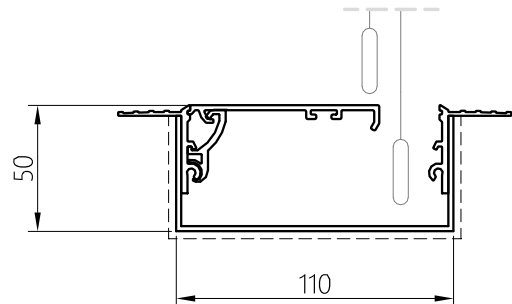

1:3 scale


PRODUCT REFERENCE

C110x170SS
SERIES SIZE CORNERS


CONCEALMENT CONFIGURATION OPTIONS



Head Box




Head Box
+ Side Boxes




Head Box
+ Side Boxes
+ Hem Bar Box


FRONT CORNERS VARIATIONS




P- Perforated Flange




S- Skim Coat Flange




U- Upstand Flange



V- Visible Flange



N- No Flange



COVER HINGE
to hold cover plate,
installed on either side

Product	Blindspace C110x170SS, C110x50SS
Description	Recessed box with optional flanges and hinged cover to conceal blinds flush with wall or ceiling finished surface.
Blind sizes	Please see size chart and supplier details for blind sizes such as max. width, height and area.
Finishes	Provided in RAL 9016 (white) Optional powder coating to other RAL colours available.
Material	Powder Coated Aluminium, Back Box EN AW-1050A, Front Corners and Cover EN 6063 T6
Optional accessories	End cap Splice pin (to align boxes) Splice plate (to align covers) Chain guide (for manual blinds) Covers in various widths
Box length	3000mm Cut to size for shorter lengths. Spliced together for longer lengths.
Installation	Boxes to be fixed with countersunk screws every 200mm through back (and both flanges when available) into appropriate backing. Scrim tape to be used on flanges. Finished plaster level to be flush with cover. Allow 3mm recess space for ease of installation, shown in dash line around boxes
Print date	2023/01/27
Page size	ISO A3 420x297
Print file	blindspace c110x170ss with standard dual roller blinds stacked.dwg